

You can't beat the system.®

List Prices & Specifications On

# Plastic Pipe

For Drainage & Pressure Applications

[Updated November 1, 2018]

SPECIFICATIONS

© 2002-2018 Charlotte Pipe and Foundry Company

## Contents

|                                              |                                    |
|----------------------------------------------|------------------------------------|
| Product Offering by Type & Diameter .....    | 3                                  |
| <u>Price Sheets</u>                          |                                    |
| ABS Foam Core DWV Pipe .....                 | ASTM F 628 ..... 4                 |
| ABS Plus® Foam Core DWV Pipe .....           | ASTM F 1488 ..... 5                |
| PVC Foam Core DWV Pipe.....                  | ASTM F 891 ..... 6                 |
| RePVC® DWV Pipe .....                        | ASTM F 1760 ..... 7                |
| PVC Schedule 40 DWV Pipe Plain End.....      | ASTM D 1785 & ASTM D 2665 ..... 8  |
| PVC Schedule 40 Pipe Plain End .....         | ASTM D 1785 & ASTM D 2665 ..... 9  |
| PVC Schedule 40 Pipe Bell End .....          | ASTM D 1785 & ASTM D 2665 ..... 10 |
| PVC Well Casing Bell End.....                | ASTM F 480..... 11                 |
| PVC SDR 21 PR-200 Pipe Bell End .....        | ASTM D 2241 ..... 11               |
| PVC SDR 26 PR-160 Pipe Bell End .....        | ASTM D 2241 ..... 11               |
| FlowGuard Gold® CPVC CTS Pipe .....          | ASTM D 2846 ..... 12               |
| ReUze® CPVC CTS Pipe .....                   | ASTM D 2846 ..... 13               |
| PVC Schedule 80 Plain End Pipe.....          | ASTM D 1785 ..... 14               |
| PVC Schedule 80 Bell End Pipe.....           | ASTM D 1785 ..... 15               |
| ChemDrain® CPVC Schedule 40 Pipe.....        | ASTM D 2618 ..... 16               |
| PVC SDR 35 Gasketed Sewer Pipe .....         | ASTM D 3034 ..... 17               |
| PVC SDR 35 PS46 Solvent Weld Sewer Pipe..... | ASTM D 3034 ..... 17               |
| PVC Sewer and Drain Solvent Weld Pipe .....  | ASTM D 2729 ..... 18               |
| Terms of Sale .....                          | 19                                 |
| Additional Information .....                 | 19                                 |
| Limited Warranty.....                        | 20                                 |
| FlowGuard Gold Warranty.....                 | 21                                 |



All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

**Prices published in this guide are list prices.**  
**Please contact Charlotte Pipe® or one of our distributors for net prices.**

Possession of this price list shall not be construed as an offer to sell the products listed.

ABS Plus, ReUze, RePVC, Charlotte Pipe, Charlotte, ChemDrain and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.  
FlowGuard Gold is a registered trademark of Lubrizol Corp.



# Pipe Reference Guide



| Product                                           | Sizes Available |     |     |     |   |       |       |   |       |   |   |   |   |   |    |    |    |    |    |
|---------------------------------------------------|-----------------|-----|-----|-----|---|-------|-------|---|-------|---|---|---|---|---|----|----|----|----|----|
|                                                   | 1/4             | 3/8 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 2 | 2 1/2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 15 | 16 |
| ChemDrain® CPVC<br>Schedule 40 ★                  |                 |     |     |     |   |       | ●     | ● |       | ● | ● |   | ● | ● |    |    |    |    |    |
| FlowGuard Gold®<br>CPVC CTS SDR 11                |                 |     | ●   | ●   | ● | ●     | ●     | ● |       |   |   |   |   |   |    |    |    |    |    |
| ReUze® CPVC CTS SDR 11                            |                 |     | ●   | ●   | ● |       | ●     | ● |       |   |   |   |   |   |    |    |    |    |    |
| PVC Schedule 80                                   | ●               | ●   | ●   | ●   | ● | ●     | ●     | ● | ●     | ● | ● | ● | ● | ● | ●  | ●  | ●  |    | ●  |
| PVC Schedule 40                                   |                 |     | ●   | ●   | ● | ●     | ●     | ● | ●     | ● | ● | ● | ● | ● | ●  | ●  | ●  |    | ●  |
| PVC Schedule 40 DWV ★                             |                 |     |     |     |   | ●     | ●     | ● |       | ● | ● | ● | ● | ● | ●  | ●  | ●  |    | ●  |
| RePVC® Schedule 40 DWV<br>with Recycled Content ★ |                 |     |     |     |   |       | ●     | ● |       | ● | ● |   | ● | ● |    |    |    |    |    |
| PVC Schedule 30 ★                                 |                 |     |     |     |   |       |       |   |       | ● |   |   |   |   |    |    |    |    |    |
| PVC DWV Foam Core ★                               |                 |     |     |     |   |       | ●     | ● |       | ● | ● |   | ● | ● | ●  | ●  |    |    |    |
| PVC Well Casing                                   |                 |     |     |     |   |       |       | ● | ●     | ● | ● |   | ● | ● | ●  | ●  | ●  |    | ●  |
| PVC SDR 13.5 (PR315)                              |                 |     | ●   |     |   |       |       |   |       |   |   |   |   |   |    |    |    |    |    |
| PVC SDR 21 (PR200)                                |                 |     |     | ●   | ● | ●     | ●     | ● |       |   |   |   |   |   |    |    |    |    |    |
| PVC SDR 26 (PR160)                                |                 |     |     |     |   | ●     | ●     | ● |       | ● |   |   |   |   |    |    |    |    |    |
| PVC SDR 35 Sewer Main<br>Belled-End ★†            |                 |     |     |     |   |       |       |   |       |   | ● |   | ● |   |    |    |    |    |    |
| PVC SDR 35 Sewer Main<br>Gasketed ★†              |                 |     |     |     |   |       |       |   |       |   | ● |   | ● | ● |    |    |    |    |    |
| PVC D 2729 Sewer and Drain ★†                     |                 |     |     |     |   |       |       |   |       | ● | ● |   |   |   |    |    |    |    |    |
| ABS DWV Foam Core ★                               |                 |     |     |     |   |       | ●     | ● |       | ● | ● |   | ● |   |    |    |    |    |    |
| ABS Plus® DWV Foam Core ★                         |                 |     |     |     |   |       | ●     | ● |       | ● | ● |   |   |   |    |    |    |    |    |

★ Non-Pressure

† Not NSF Listed

**You can't beat the system.®**

Notes:

- End treatments are Plain and Belled. Consult factory for availability.
- Lengths are 10 and 20 feet (14 and 20 feet for Gasketed Sewer Main. Consult factory for availability and non-standard lengths.
- PVC Schedule 40 Bell End and PVC Well Casing pipe lengths for sizes 4", 6", and 8" are 20 feet plus the bell (20 foot laying length). The length for all other sizes of Schedule 40 Bell End pipe and PVC Well Casing pipe are 20 feet, including the bell.
- PVC SDR 35 Sewer Main Pipe in 14 foot lengths are 14 feet plus the bell (14 foot laying length).

ABS Plus, ReUze, RePVC, ChemDrain and "You can't beat the system" and are registered trademarks of Charlotte Pipe and Foundry Company. FlowGuard Gold is a registered trademark of Lubrizol Corp.

# ABS Foam Core DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.



## >> ABS Schedule 40 DWV Pipe (For Non-Pressure Applications)

| ABS SCHEDULE 40 FOAM CORE (BLACK) |           |                  |                  | PLAIN END                        |               |                 | ASTM F 628                |                           |
|-----------------------------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|---------------------------|---------------------------|
| PART NO.                          | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| ABS 3112                          | 1½" x 10' | 03132            | 2590'            | 2.500                            | 1.900         | 0.145           | 27.1                      | <b>\$113.20</b>           |
| ABS 3112                          | 1½" x 20' | 03133            | 5180'            | 5.000                            | 1.900         | 0.145           | 27.1                      | <b>\$113.20</b>           |
| ABS 3200                          | 2" x 10'  | 03134            | 1670'            | 2.500                            | 2.375         | 0.154           | 37.7                      | <b>\$151.90</b>           |
| ABS 3200                          | 2" x 20'  | 03135            | 3340'            | 5.000                            | 2.375         | 0.154           | 37.7                      | <b>\$151.90</b>           |
| ABS 3300                          | 3" x 10'  | 03136            | 750'             | 2.500                            | 3.500         | 0.216           | 74.5                      | <b>\$314.00</b>           |
| ABS 3300                          | 3" x 20'  | 03137            | 1500'            | 5.000                            | 3.500         | 0.216           | 74.5                      | <b>\$314.00</b>           |
| ABS 3400                          | 4" x 10'  | 03138            | 480'             | 2.500                            | 4.500         | 0.237           | 107.1                     | <b>\$449.00</b>           |
| ABS 3400                          | 4" x 20'  | 03139            | 960'             | 5.000                            | 4.500         | 0.237           | 107.1                     | <b>\$449.00</b>           |
| ABS 3600                          | 6" x 20'  | 03141            | 400'             | 5.000                            | 6.625         | 0.280           | 187.8                     | <b>\$914.70</b>           |

**NOTE:** For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

NSF Listed. Meets All Requirements of ASTM F 628.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

## NOTICE

### NOT FOR PRESSURE

Do not use PVC / ABS / ABS Plus® cellular core (foam core) pipe for pressure applications. The use of cellular core pipe in pressure applications may result in system failure and property damage.

## WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

# ABS Plus® Foam Core DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.  
ABS Plus is a registered trademark of Charlotte Pipe and Foundry Company.



## >> ABS Plus® Schedule 40 DWV Pipe (For Non-Pressure Applications)

| ABS PLUS® SCHEDULE 40 FOAM CORE (BLACK) |           |                  |                  |                                  | PLAIN END     |                 | ASTM F 1488               |                           |
|-----------------------------------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|---------------------------|---------------------------|
| PART NO.                                | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| APA 17112                               | 1½" x 10' | 12495            | 2590'            | 2.500                            | 1.900         | 0.145           | 31.4                      | <b>\$113.20</b>           |
| APA 17112                               | 1½" x 20' | 12494            | 5180'            | 5.000                            | 1.900         | 0.145           | 31.4                      | <b>\$113.20</b>           |
| APA 17200                               | 2" x 10'  | 12497            | 1670'            | 2.500                            | 2.375         | 0.154           | 41.9                      | <b>\$151.90</b>           |
| APA 17200                               | 2" x 20'  | 12496            | 3340'            | 5.000                            | 2.375         | 0.154           | 41.9                      | <b>\$151.90</b>           |
| APA 17300                               | 3" x 10'  | 12499            | 750'             | 2.500                            | 3.500         | 0.216           | 84.0                      | <b>\$314.00</b>           |
| APA 17300                               | 3" x 20'  | 12498            | 1500'            | 5.000                            | 3.500         | 0.216           | 84.0                      | <b>\$314.00</b>           |
| APA 17400                               | 4" x 10'  | 12501            | 480'             | 2.500                            | 4.500         | 0.237           | 118.8                     | <b>\$449.00</b>           |
| APA 17400                               | 4" x 20'  | 12500            | 960'             | 5.000                            | 4.500         | 0.237           | 118.8                     | <b>\$449.00</b>           |

**NOTE:** For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

NSF Listed. Meets All Requirements of ASTM F 1488.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

## NOTICE

### NOT FOR PRESSURE

Do not use PVC / ABS / ABS Plus® cellular core (foam core) pipe for pressure applications. The use of cellular core pipe in pressure applications may result in system failure and property damage.

## ! WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC pipe or fittings.
- NEVER test PVC / ABS / CPVC pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

# PVC Foam Core DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.



## >> PVC Schedule 40 DWV Pipe (For Non-Pressure Applications)

| PVC SCHEDULE 40 FOAM CORE (WHITE) |           |                  |                  | PLAIN END                        |               |                 | ASTM F 891                |                           |
|-----------------------------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|---------------------------|---------------------------|
| PART NO.                          | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 4112                          | 1½" x 10' | 04178            | 1650'            | 1.785                            | 1.785         | 0.145           | 32.3                      | \$89.00                   |
| PVC 4112                          | 1½" x 20' | 04177            | 3300'            | 3.570                            | 1.900         | 0.145           | 32.3                      | \$89.00                   |
| PVC 4200                          | 2" x 10'  | 04174            | 1110'            | 1.780                            | 2.375         | 0.154           | 43.3                      | \$120.00                  |
| PVC 4200                          | 2" x 20'  | 04173            | 2220'            | 3.570                            | 2.375         | 0.154           | 43.9                      | \$120.00                  |
| PVC 4300                          | 3" x 10'  | 03934            | 1040'            | 4.160                            | 3.500         | 0.216           | 89.7                      | \$245.00                  |
| PVC 4300                          | 3" x 20'  | 03935            | 920'             | 3.570                            | 3.500         | 0.216           | 89.7                      | \$245.00                  |
| PVC 4400                          | 4" x 10'  | 03936            | 600'             | 4.160                            | 4.500         | 0.237           | 123.8                     | \$336.00                  |
| PVC 4400                          | 4" x 20'  | 03937            | 1200'            | 7.144                            | 4.500         | 0.237           | 123.8                     | \$336.00                  |
| PVC 4600                          | 6" x 10'  | 03938            | 330'             | 4.166                            | 6.625         | 0.280           | 235.0                     | \$569.00                  |
| PVC 4600                          | 6" x 20'  | 03939            | 660'             | 7.144                            | 6.625         | 0.280           | 235.0                     | \$569.00                  |
| PVC 4800                          | 8" x 20'  | 03941            | 360'             | 8.330                            | 8.625         | 0.322           | 371.0                     | \$854.00                  |
| PVC 4910                          | 10" x 20' | 03942            | 220'             | 8.330                            | 10.750        | 0.365           | 566.3                     | \$1,425.00                |
| PVC 4912                          | 12" x 20' | 03943            | 120'             | 8.928                            | 12.750        | 0.406           | 700.0                     | \$2,095.00                |

| PVC SCHEDULE 40 FOAM CORE (WHITE) |           |                  |                  | BELL-END                         |               |                 |                           |                           |
|-----------------------------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|---------------------------|---------------------------|
| PART NO.                          | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 4300B                         | 3" x 20'  | 04782            | 920'             | 3.570                            | 3.500         | 0.216           | 89.7                      | \$306.00                  |
| PVC 4400B                         | 4" x 10'  | 04783            | 540'             | 4.160                            | 4.500         | 0.237           | 123.8                     | \$420.00                  |
| PVC 4400B                         | 4" x 20'  | 04784            | 1080'            | 7.144                            | 4.500         | 0.237           | 123.8                     | \$420.00                  |
| PVC 4600B                         | 6" x 10'  | 09904            | 330'             | 4.166                            | 6.625         | 0.280           | 235.0                     | \$711.00                  |
| PVC 4600B                         | 6" x 20'  | 04786            | 660'             | 8.330                            | 6.625         | 0.280           | 235.0                     | \$711.00                  |

**NOTE:** When ordering, please specify plain end or bell-end.  
For truckloads of mixed sizes, multiply skids desired by  
truckload percent per skid.

NSF Listed. Meets All Requirements of ASTM F 891.

## NOTICE

### NOT FOR PRESSURE

Do not use RePVC DWV pipe for pressure applications. The use of co-extruded DWV pipe in pressure applications may result in system failure and property damage.



## WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

# RePVC® DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.  
RePVC and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.



## >> PVC Schedule 40 DWV Pipe with Recycled Content

| PVC SCHEDULE 40 (WHITE) |           |                  | PLAIN END FOR NON-PRESSURE APPLICATIONS |                                  |               |                 | ASTM F 1760               |                           |
|-------------------------|-----------|------------------|-----------------------------------------|----------------------------------|---------------|-----------------|---------------------------|---------------------------|
| PART NO.                | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID                        | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 15112               | 1½" x 20' | 11744            | 3300'                                   | 3.570                            | 1.900         | 0.145           | 50.7                      | <b>\$123.00</b>           |
| PVC 15200               | 2" x 20'  | 11745            | 2220'                                   | 3.570                            | 2.375         | 0.154           | 68.1                      | <b>\$167.00</b>           |
| PVC 15300               | 3" x 20'  | 11746            | 920'                                    | 3.570                            | 3.500         | 0.216           | 141.2                     | <b>\$328.00</b>           |
| PVC 15400               | 4" x 20'  | 11748            | 1200'                                   | 7.144                            | 4.500         | 0.237           | 201.2                     | <b>\$458.00</b>           |
| PVC 15600               | 6" x 20'  | 11749            | 560'                                    | 8.330                            | 6.625         | 0.280           | 353.7                     | <b>\$1,042.00</b>         |
| PVC 15800               | 8" x 20'  | 11984            | 360'                                    | 8.330                            | 8.625         | 0.322           | 544.6                     | <b>\$1,330.00</b>         |

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.

NOTE: For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.



NSF Listed. Meets All Requirements of ASTM D 4396 and ASTM F 1760.

**You can't beat the system.®**

## NOTICE

### NOT FOR PRESSURE

Do not use RePVC DWV pipe for pressure applications. The use of co-extruded DWV pipe in pressure applications may result in system failure and property damage.



## WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

# PVC Schedule 40 DWV Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.



## >> PVC Schedule 40 DWV Pipe

| PVC SCHEDULE 40 (WHITE) |           |                  | PLAIN END        |                                  | PVC 1120      |                 | ASTM D 2665               |                           |
|-------------------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|---------------------------|---------------------------|
| PART NO.                | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 7100*               | 1¼"x10'   | 03945            | 2120'            | 1.780                            | 1.660         | .140            | 42.4                      | <b>\$106.00</b>           |
| PVC 7100*               | 1¼"x20'   | 03946            | 4240'            | 4.166                            | 1.660         | .140            | 42.4                      | <b>\$106.00</b>           |
| PVC 7112*               | 1½"x10'   | 03947            | 1650'            | 1.780                            | 1.900         | .145            | 51.8                      | <b>\$124.00</b>           |
| PVC 7112*               | 1½"x20'   | 03948            | 3300'            | 3.570                            | 1.900         | .145            | 51.8                      | <b>\$124.00</b>           |
| PVC 7200*               | 2"x10'    | 03949            | 1110'            | 1.780                            | 2.375         | .154            | 69.5                      | <b>\$162.00</b>           |
| PVC 7200*               | 2"x20'    | 03950            | 2220'            | 3.570                            | 2.375         | .154            | 69.5                      | <b>\$162.00</b>           |
| PVC 7300*               | 3"x10'    | 03951            | 1040'            | 4.160                            | 3.500         | .216            | 144.2                     | <b>\$326.00</b>           |
| PVC 7300*               | 3"x20'    | 03952            | 920'             | 3.570                            | 3.500         | .216            | 144.2                     | <b>\$326.00</b>           |
| PVC 7400†               | 4"x10'    | 03953            | 600'             | 4.160                            | 4.500         | .237            | 205.5                     | <b>\$460.00</b>           |
| PVC 7400†               | 4"x20'    | 03954            | 1200'            | 7.144                            | 4.500         | .237            | 205.5                     | <b>\$460.00</b>           |
| PVC 7500†               | 5"x20'    | 04837            | 760'             | 7.144                            | 5.563         | .258            | 272.5                     | <b>\$630.00</b>           |
| PVC 7600†               | 6"x10'    | 03955            | 330'             | 4.160                            | 6.625         | .280            | 361.2                     | <b>\$816.00</b>           |
| PVC 7600†               | 6"x20'    | 03956            | 660'             | 8.333                            | 6.625         | .280            | 361.2                     | <b>\$816.00</b>           |
| PVC 7800†               | 8"x10'    | 13087            | 180'             | 4.160                            | 8.625         | .322            | 543.6                     | <b>\$1240.00</b>          |
| PVC 7800†               | 8"x20'    | 03958            | 360'             | 8.330                            | 8.625         | .322            | 543.6                     | <b>\$1240.00</b>          |
| PVC 7910†               | 10"x20'   | 03959            | 220'             | 8.330                            | 10.750        | .365            | 770.7                     | <b>\$1900.00</b>          |
| PVC 7912†               | 12"x20'   | 03961            | 120'             | 7.144                            | 12.750        | .406            | 1019.0                    | <b>\$2778.00</b>          |
| PVC 7914†               | 14"x20'   | 04862            | 60'              | 4.160                            | 14.000        | .437            | 1205.0                    | <b>\$3281.00</b>          |
| PVC 7916†               | 16"x20'   | 04918            | 60'              | 5.000                            | 16.000        | .500            | 1575.7                    | <b>\$4290.00</b>          |

\* Dual marked ASTM D 1785 and ASTM D 2665.

† Triple Marked ASTM D 1785 & ASTM D 2665 & ASTM F 480.

**NOTE:** When ordering, please specify plain end or bell end. For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

NSF Listed. Meets All Requirements of ASTM D 1784, ASTM D 1785, and ASTM D 2665.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.



## ! WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.



# PVC Pipe: Schedule 40



## >> PVC Schedule 40 Pipe - Plain End

| PVC SCHEDULE 40 (WHITE) |            |                  | PLAIN END        |                                  |               | PVC 1120        |                                           | ASTM D 1785               |                           |
|-------------------------|------------|------------------|------------------|----------------------------------|---------------|-----------------|-------------------------------------------|---------------------------|---------------------------|
| PART NO.                | NOM. SIZE  | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | MAX WORK<br>PRESSURE<br>AT 23° C OR 73° F | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 4005                | 1/2"x10'   | 06658            | 4500'            | 2.083                            | .840          | .109            | 600 PSI                                   | 15.9                      | \$ 41.60                  |
| PVC 4005                | 1/2"x20'   | 03922            | 9000'            | 4.166                            | .840          | .109            | 600 PSI                                   | 15.9                      | \$ 41.60                  |
| PVC 4007                | 3/4"x10'   | 06661            | 3500'            | 2.083                            | 1.050         | .113            | 480 PSI                                   | 21.1                      | \$ 54.00                  |
| PVC 4007                | 3/4"x20'   | 03925            | 7000'            | 4.166                            | 1.050         | .113            | 480 PSI                                   | 21.1                      | \$ 54.00                  |
| PVC 4010                | 1"x10'     | 06664            | 3000'            | 2.083                            | 1.315         | .133            | 450 PSI                                   | 31.3                      | \$ 79.60                  |
| PVC 4010                | 1"x20'     | 03928            | 6000'            | 4.166                            | 1.315         | .133            | 450 PSI                                   | 31.3                      | \$ 79.60                  |
| PVC 7100*               | 1 1/4"x10' | 03945            | 2120'            | 1.780                            | 1.660         | .140            | 370 PSI                                   | 42.4                      | \$106.00                  |
| PVC 7100*               | 1 1/4"x20' | 03946            | 4240'            | 4.166                            | 1.660         | .140            | 370 PSI                                   | 42.4                      | \$106.00                  |
| PVC 7112*               | 1 1/2"x10' | 03947            | 1650'            | 1.780                            | 1.900         | .145            | 330 PSI                                   | 51.8                      | \$124.00                  |
| PVC 7112*               | 1 1/2"x20' | 03948            | 3300'            | 3.570                            | 1.900         | .145            | 330 PSI                                   | 51.8                      | \$124.00                  |
| PVC 7200*               | 2"x10'     | 03949            | 1110'            | 1.780                            | 2.375         | .154            | 280 PSI                                   | 69.5                      | \$162.00                  |
| PVC 7200*               | 2"x20'     | 03950            | 2220'            | 3.570                            | 2.375         | .154            | 280 PSI                                   | 69.5                      | \$162.00                  |
| PVC 4025†               | 2 1/2"x20' | 04205            | 1360'            | 3.570                            | 2.875         | .203            | 300 PSI                                   | 110.0                     | \$257.00                  |
| PVC 7300*               | 3"x10'     | 03951            | 1040'            | 4.160                            | 3.500         | .216            | 260 PSI                                   | 144.2                     | \$326.00                  |
| PVC 7300*               | 3"x20'     | 03952            | 920'             | 3.570                            | 3.500         | .216            | 260 PSI                                   | 144.2                     | \$326.00                  |
| PVC 7400†               | 4"x10'     | 03953            | 600'             | 4.160                            | 4.500         | .237            | 220 PSI                                   | 205.5                     | \$460.00                  |
| PVC 7400†               | 4"x20'     | 03954            | 1200'            | 7.144                            | 4.500         | .237            | 220 PSI                                   | 205.5                     | \$460.00                  |
| PVC 7500†               | 5"x20'     | 04837            | 760'             | 7.144                            | 5.563         | .258            | 190 PSI                                   | 272.5                     | \$630.00                  |
| PVC 7600†               | 6"x10'     | 03955            | 330'             | 4.160                            | 6.625         | .280            | 180 PSI                                   | 361.2                     | \$816.00                  |
| PVC 7600†               | 6"x20'     | 03956            | 660'             | 8.333                            | 6.625         | .280            | 180 PSI                                   | 361.2                     | \$816.00                  |
| PVC 7800†               | 8"x10'     | 13087            | 180'             | 4.160                            | 8.625         | .322            | 160 PSI                                   | 543.6                     | \$1240.00                 |
| PVC 7800†               | 8"x20'     | 03958            | 360'             | 8.330                            | 8.625         | .322            | 160 PSI                                   | 543.6                     | \$1240.00                 |
| PVC 7910†               | 10"x20'    | 03959            | 220'             | 8.330                            | 10.750        | .365            | 140 PSI                                   | 770.7                     | \$1900.00                 |
| PVC 7912†               | 12"x20'    | 03961            | 120'             | 7.144                            | 12.750        | .406            | 130 PSI                                   | 1019.0                    | \$2778.00                 |
| PVC 7914†               | 14"x20'    | 04862            | 60'              | 4.160                            | 14.000        | .437            | 130 PSI                                   | 1205.0                    | \$3281.00                 |
| PVC 7916†               | 16"x20'    | 04918            | 60'              | 5.000                            | 16.000        | .500            | 130 PSI                                   | 1575.7                    | \$4290.00                 |

\* Dual marked ASTM D 1785 and ASTM D 2665.

† Triple Marked ASTM D 1785 & ASTM D 2665 & ASTM F 480.

‡ Dual marked ASTM D 1785 and ASTM F 480.

NOTE: When ordering, please specify plain end or bell end.

NSF Listed. Meets All Requirements of ASTM D 1784 and ASTM D 1785.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.



**You can't beat the system.®**

## ⚠ WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

## >> PVC Schedule 40 Pipe - Bell End\*

| PVC SCHEDULE 40 (WHITE) |           |                  |                      | BELL END                     |               |                 | PVC 1120                                  |                     | ASTM D 1785               |                           |
|-------------------------|-----------|------------------|----------------------|------------------------------|---------------|-----------------|-------------------------------------------|---------------------|---------------------------|---------------------------|
| PART NO.                | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>PER SKID | TRUCKLOAD<br>PERCENT<br>SKID | AVG. OD (IN.) | MIN. WALL (IN.) | MAX WORK<br>PRESSURE<br>AT 23° C OR 73° F | BELL DEPTH<br>(IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 4005B**             | ½"x10'    | 04986            | 6000'                | 2.083                        | .840          | .109            | 600 PSI                                   | 2.00                | 15.9                      | \$ 41.60                  |
| PVC 4005B**             | ½"x20'    | 03923            | 9000'                | 4.166                        | .840          | .109            | 600 PSI                                   | 2.00                | 15.9                      | \$ 41.60                  |
| PVC 4007B**             | ¾"x10'    | 04987            | 4000'                | 2.083                        | 1.050         | .113            | 480 PSI                                   | 2.25                | 21.1                      | \$ 54.00                  |
| PVC 4007B**             | ¾"x20'    | 03926            | 7000'                | 4.166                        | 1.050         | .113            | 480 PSI                                   | 2.25                | 21.1                      | \$ 54.00                  |
| PVC 4010B**             | 1"x10'    | 04988            | 3000'                | 1.780                        | 1.315         | .133            | 450 PSI                                   | 2.50                | 31.3                      | \$ 79.60                  |
| PVC 4010B**             | 1"x20'    | 03929            | 6000'                | 3.570                        | 1.315         | .133            | 450 PSI                                   | 2.50                | 31.1                      | \$ 79.60                  |
| PVC 4012B§              | 1¼"x10'   | 04989            | 2000'                | 2.083                        | 1.660         | .140            | 370 PSI                                   | 2.75                | 42.4                      | \$108.40                  |
| PVC 4012B§              | 1¼"x20'   | 03930            | 4000'                | 3.570                        | 1.660         | .140            | 370 PSI                                   | 2.75                | 42.4                      | \$108.40                  |
| PVC 4015B§              | 1½"x10'   | 04990            | 1650'                | 1.785                        | 1.900         | .145            | 330 PSI                                   | 3.00                | 51.8                      | \$127.60                  |
| PVC 4015B§              | 1½"x20'   | 03931            | 3300'                | 3.570                        | 1.900         | .145            | 330 PSI                                   | 3.00                | 51.8                      | \$127.60                  |
| PVC 4020B†              | 2"x10'    | 04991            | 1110'                | 1.786                        | 2.375         | .154            | 280 PSI                                   | 4.00                | 69.5                      | \$165.60                  |
| PVC 4020B†              | 2"x20'    | 03932            | 2220'                | 3.570                        | 2.375         | .154            | 280 PSI                                   | 4.00                | 69.5                      | \$165.60                  |
| PVC 4025B‡              | 2½"x20'   | 04206            | 1360'                | 3.570                        | 2.875         | .203            | 300 PSI                                   | 4.00                | 110.0                     | \$262.00                  |
| PVC 7300B§              | 3"x10'    | 04853            | 1040'                | 4.160                        | 3.500         | .216            | 260 PSI                                   | 4.00                | 147.6                     | \$340.00                  |
| PVC 4030B†              | 3"x20'    | 03933            | 920'                 | 3.570                        | 3.500         | .216            | 260 PSI                                   | 4.00                | 144.2                     | \$340.00                  |
| PVC 7400B§              | 4"x10'    | 04835            | 540'                 | 4.160                        | 4.500         | .237            | 220 PSI                                   | 4.00                | 212.3                     | \$489.00                  |
| PVC 9400B†              | 4"x20'    | 03964            | 1080'                | 7.144                        | 4.500         | .237            | 220 PSI                                   | 5.00                | 210.6                     | \$489.00                  |
| PVC 7600B§              | 6"x10'    | 04850            | 330'                 | 4.160                        | 6.625         | .280            | 180 PSI                                   | 6.50                | 379.3                     | \$852.00                  |
| PVC 9600B†              | 6"x20'    | 03965            | 660'                 | 8.333                        | 6.625         | .280            | 180 PSI                                   | 6.50                | 373.2                     | \$852.00                  |
| PVC 7800B†              | 8"x10'    | 09903            | 100'                 | 2.500                        | 8.625         | .322            | 160 PSI                                   | 7.00                | 556.9                     | \$1296.00                 |
| PVC 9800B†              | 8"x20'    | 03967            | 200'                 | 5.000                        | 8.625         | .322            | 160 PSI                                   | 7.00                | 564.0                     | \$1296.00                 |
| PVC 7910B†              | 10"x20'   | 03960            | 160'                 | 6.250                        | 10.750        | .365            | 140 PSI                                   | 9.00                | 781.4                     | \$1940.00                 |
| PVC 7912B†              | 12"x20'   | 03962            | 120'                 | 7.144                        | 12.750        | .406            | 130 PSI                                   | 10.00               | 1033.2                    | \$2836.00                 |
| PVC 7914B†              | 14"x20'   | 04863            | 60'                  | 4.160                        | 14.000        | .437            | 130 PSI                                   | 10.00               | 1221.8                    | \$3350.00                 |
| PVC 7916B†              | 16"x20'   | 04929            | 60'                  | 5.000                        | 16.000        | .500            | 130 PSI                                   | 10.00               | 1594.5                    | \$4380.00                 |

\* Bell dimensions meet either ASTM D 2672 or ASTM F 480,  
depending upon pipe diameter

\*\* ASTM D 1785

§ Dual Marked ASTM D 1785 & ASTM D 2665

† Triple Marked ASTM D 1785 & ASTM D 2665 & ASTM F 480

‡ Dual Marked ASTM D 1785 & ASTM F 480

All products manufactured by Charlotte Pipe and  
Foundry Company are proudly made in the U.S.A.



## WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

## >> PVC Well Casing

| PVC SCHEDULE 40 (WHITE) |           |                  | BELL END WELL CASING |                                  |               | PVC 1120        |                     | ASTM F 480                |                           |
|-------------------------|-----------|------------------|----------------------|----------------------------------|---------------|-----------------|---------------------|---------------------------|---------------------------|
| PART NO.                | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID     | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | BELL DEPTH<br>(IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 4020B               | 2"x20'    | 03932            | 2220'                | 3.570                            | 2.375         | .154            | 4.00                | 69.5                      | \$ 165.60                 |
| PVC 4025B               | 2½"x20'   | 04206            | 1360'                | 3.570                            | 2.875         | .203            | 4.00                | 110.0                     | \$ 262.00                 |
| PVC 4030B               | 3"x20'    | 03933            | 920'                 | 3.570                            | 3.500         | .216            | 4.00                | 144.2                     | \$ 340.00                 |
| PVC 9400B               | 4"x20'    | 03964            | 1080'                | 7.144                            | 4.500         | .237            | 5.00                | 210.6                     | \$ 489.00                 |
| PVC 9600B               | 6"x20'    | 03965            | 660'                 | 8.333                            | 6.625         | .280            | 6.50                | 373.2                     | \$ 852.00                 |
| PVC 9800B               | 8"x20'    | 03967            | 200'                 | 5.000                            | 8.625         | .322            | 7.00                | 564.0                     | \$1296.00                 |
| PVC 7910B               | 10" x 20' | 03960            | 160'                 | 6.250                            | 10.750        | .365            | 9.00                | 781.4                     | \$1940.00                 |
| PVC 7912B               | 12" x 20' | 03962            | 120'                 | 7.144                            | 12.750        | .406            | 10.00               | 1033.2                    | \$2836.00                 |
| PVC 7914B               | 14" x 20' | 04863            | 60'                  | 4.160                            | 14.000        | .437            | 10.00               | 1221.8                    | \$3350.00                 |
| PVC 7916B               | 16" x 20' | 04929            | 60'                  | 5.000                            | 16.000        | .500            | 10.00               | 1594.5                    | \$4380.00                 |

## >> PVC SDR Pipe

| PR 200     |           | PVC 1120         |                  | BELL END                         |               | ASTM D 2241     |                                           |                     | SDR 21                    |                           |
|------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|-------------------------------------------|---------------------|---------------------------|---------------------------|
| PART NO.   | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | MAX WORK<br>PRESSURE<br>AT 23° C OR 73° F | BELL DEPTH<br>(IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 23155B | *1½"x20'  | 03991            | 9000'            | 3.570                            | .840          | .062            | 315 PSI                                   | 2.00                | 10.0                      | \$ 27.00                  |
| PVC 20007B | ¾"x10'    | 10742            | 3500'            | 2.083                            | 1.050         | .060            | 200 PSI                                   | 2.25                | 12.7                      | \$ 32.80                  |
| PVC 20007B | ¾"x20'    | 03984            | 7000'            | 3.570                            | 1.050         | .060            | 200 PSI                                   | 2.25                | 12.7                      | \$ 32.80                  |
| PVC 20010B | 1"x20'    | 03986            | 6000'            | 4.166                            | 1.315         | .063            | 200 PSI                                   | 2.50                | 16.9                      | \$ 42.00                  |
| PVC 20012B | 1¼"x20'   | 03987            | 4000'            | 4.166                            | 1.660         | .079            | 200 PSI                                   | 2.75                | 25.5                      | \$ 66.00                  |
| PVC 20015B | 1½"x20'   | 03988            | 3300'            | 3.570                            | 1.900         | .090            | 200 PSI                                   | 3.00                | 32.4                      | \$ 86.40                  |
| PVC 20020B | 2"x20'    | 03989            | 2220'            | 3.570                            | 2.375         | .113            | 200 PSI                                   | 4.00                | 50.8                      | \$126.00                  |

\*PR 315 / SDR 13.5

| PR 160     |           | PVC 1120         |                  | BELL END                         |               | ASTM D 2241     |                                           |                     | SDR 26                    |                           |
|------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|-------------------------------------------|---------------------|---------------------------|---------------------------|
| PART NO.   | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | MAX WORK<br>PRESSURE<br>AT 23° C OR 73° F | BELL DEPTH<br>(IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 16012B | 1¼"x20'   | 04211            | 4000'            | 4.166                            | 1.660         | .064            | 160 PSI                                   | 2.75                | 21.5                      | \$ 52.00                  |
| PVC 16015B | 1½"x20'   | 04210            | 3300'            | 3.570                            | 1.900         | .073            | 160 PSI                                   | 3.00                | 27.0                      | \$ 67.00                  |
| PVC 16020B | 2"x20'    | 04212            | 2220'            | 3.570                            | 2.375         | .091            | 160 PSI                                   | 4.00                | 41.4                      | \$103.00                  |
| PVC 16030B | 3"x20'    | 04222            | 1000'            | 3.570                            | 3.500         | .135            | 160 PSI                                   | 4.00                | 90.8                      | \$223.00                  |

NOTE: When ordering, please specify plain end or bell end.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.



You can't beat the system.®

# ! WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

# FlowGuard Gold® Pipe

Possession of this price list shall not be construed as an offer to sell the products listed. FlowGuard Gold is a registered trademark of Lubrizol Corp.



## >> CPVC Copper Tube Size Pipe

| STRAIGHT LENGTHS |           |                  | PLAIN END SDR 11 CPVC COPPER TUBE SIZE PIPE |                                  |                  |               |                    |                                           | ASTM D 2846               |                           |
|------------------|-----------|------------------|---------------------------------------------|----------------------------------|------------------|---------------|--------------------|-------------------------------------------|---------------------------|---------------------------|
| PART NO.         | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>BUNDLE                          | TRUCKLOAD<br>PERCENT<br>PER SKID | QTY. PER<br>SKID | AVG. OD (IN.) | MIN. WALL<br>(IN.) | MAX WORK<br>PRESSURE<br>AT 23° C OR 73° F | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| CTS 12005        | ½" x 10'  | 04979            | 500'                                        | 2.083                            | 12,000'          | .625          | .068               | 400 PSI                                   | 8.3                       | \$242.00                  |
| CTS 12005        | ½" x 20'  | 04993            | 1,000'                                      | 5.000                            | 24,000'          | .625          | .068               | 400 PSI                                   | 8.3                       | \$242.00                  |
| CTS 12007        | ¾" x 10'  | 04980            | 250'                                        | 2.083                            | 6,000'           | .875          | .080               | 400 PSI                                   | 13.9                      | \$372.00                  |
| CTS 12007        | ¾" x 20'  | 05145            | 500'                                        | 5.000                            | 12,000'          | .875          | .080               | 400 PSI                                   | 13.9                      | \$372.00                  |
| CTS 12010        | 1" x 10'  | 05146            | 150'                                        | 2.083                            | 3,600'           | 1.125         | .102               | 400 PSI                                   | 22.2                      | \$798.00                  |
| CTS 12010        | 1" x 20'  | 05147            | 300'                                        | 5.000                            | 7,200'           | 1.125         | .102               | 400 PSI                                   | 22.2                      | \$798.00                  |
| CTS 12012        | 1¼" x 10' | 05148            | 100'                                        | 2.083                            | 2,400'           | 1.375         | .125               | 400 PSI                                   | 33.3                      | \$1,393.00                |
| CTS 12012        | 1¼" x 20' | 05321            | 200'                                        | 5.000                            | 4,800'           | 1.375         | .125               | 400 PSI                                   | 33.3                      | \$1,393.00                |
| CTS 12015        | 1½" x 10' | 05150            | 60'                                         | 2.083                            | 1,440'           | 1.625         | .148               | 400 PSI                                   | 46.6                      | \$1,853.00                |
| CTS 12015        | 1½" x 20' | 05306            | 120'                                        | 5.000                            | 2,880'           | 1.625         | .148               | 400 PSI                                   | 46.6                      | \$1,853.00                |
| CTS 12020        | 2" x 10'  | 05152            | 40'                                         | 2.083                            | 960'             | 2.125         | .193               | 400 PSI                                   | 79.5                      | \$3,127.00                |
| CTS 12020        | 2" x 20'  | 05322            | 80'                                         | 5.000                            | 1,920'           | 2.125         | .193               | 400 PSI                                   | 79.5                      | \$3,127.00                |

NOTE: STRAIGHT LENGTH PIPE ARE SHIPPED IN FULL BUNDLE QUANTITY ONLY.

| COILED PIPE SDR 11 |           |                  | COILED SDR CPVC COPPER TUBE SIZE PIPE |                                  |                  |               |                    |                                           | ASTM D 2846               |                           |
|--------------------|-----------|------------------|---------------------------------------|----------------------------------|------------------|---------------|--------------------|-------------------------------------------|---------------------------|---------------------------|
| PART NO.           | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>BUNDLE                    | TRUCKLOAD<br>PERCENT<br>PER SKID | QTY. PER<br>SKID | AVG. OD (IN.) | MIN. WALL<br>(IN.) | MAX WORK<br>PRESSURE<br>AT 23° C OR 73° F | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| CTS 12005          | ½" x 150' | 05313            | 150'                                  | 4.166                            | 3,750'           | .625          | .068               | 400 PSI                                   | 8.3                       | \$415.00                  |
| CTS 12007          | ¾" x 100' | 05314            | 100'                                  | 4.166                            | 2,500'           | .875          | .080               | 400 PSI                                   | 13.9                      | \$820.00                  |
| CTS 12010          | 1" x 100' | 10643            | 100'                                  | 4.166                            | 1,200'           | 1.125         | .102               | 400 PSI                                   | 22.2                      | \$1,491.00                |

NSF Listed. Meets All Requirements of ASTM D 2846.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.



You can't beat the system.®

**WARNING**

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

# ReUze® Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.  
ReUze and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.



## >> CPVC Copper-Tube-Size Pipe for Non-Potable Water Distribution

| STRAIGHT LENGTHS |           |                  | PLAIN END SDR 11 CPVC COPPER TUBE SIZE PIPE |                                  |                  |               |                    |                                           | ASTM D 2846               |                           |
|------------------|-----------|------------------|---------------------------------------------|----------------------------------|------------------|---------------|--------------------|-------------------------------------------|---------------------------|---------------------------|
| PART NO.         | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>BUNDLE                          | TRUCKLOAD<br>PERCENT<br>PER SKID | QTY. PER<br>SKID | AVG. OD (IN.) | MIN. WALL<br>(IN.) | MAX WORK<br>PRESSURE<br>AT 23° C OR 73° F | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| CTS 12005 RU     | ½" x 20'  | 11642            | 1,000'                                      | 5.000                            | 24,000'          | .625          | .068               | 400 PSI                                   | 8.3                       | <b>\$156.00</b>           |
| CTS 12007 RU     | ¾" x 20'  | 11643            | 500'                                        | 5.000                            | 12,000'          | .875          | .080               | 400 PSI                                   | 13.9                      | <b>\$282.00</b>           |
| CTS 12010 RU     | 1" x 20'  | 11644            | 300'                                        | 5.000                            | 7,200'           | 1.125         | .102               | 400 PSI                                   | 22.2                      | <b>\$575.00</b>           |
| CTS 12015 RU     | 1½" x 20' | 11645            | 120'                                        | 5.000                            | 2,880'           | 1.625         | .148               | 400 PSI                                   | 46.6                      | <b>\$1,133.00</b>         |
| CTS 12020 RU     | 2" x 20'  | 11646            | 80'                                         | 5.000                            | 1,920'           | 2.125         | .193               | 400 PSI                                   | 79.5                      | <b>\$1,918.00</b>         |

NOTE: STRAIGHT LENGTH PIPE ARE SHIPPED IN FULL BUNDLE QUANTITY ONLY.

NSF Listed. Meets All Requirements of ASTM D 2846.

Due to conflicting requirements in the plumbing codes,  
pipe marking may not be in conformance with local code  
requirements. Check code requirements for conformance  
with all local plumbing and building codes.

All products manufactured by Charlotte Pipe and  
Foundry Company are proudly made in the U.S.A.



**You can't beat the system.®**

**WARNING**

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

# PVC Schedule 80 Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.



## >> PVC Schedule 80 Pipe, Type 1, Grade 1 - Plain End

ASTM D 1784 & ASTM D 1785

| PVC SCHEDULE 80 (GRAY) |           |                  |                  | PLAIN END                        |               |                 | PVC 1120                                  |                           |                           |
|------------------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|-------------------------------------------|---------------------------|---------------------------|
| PART NO.               | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | MAX WORK<br>PRESSURE<br>AT 23° C OR 73° F | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 10002              | ¼"x20'    | 04920            | 15140'           | 2.083                            | 0.540         | .119            | 1130 PSI                                  | 10.0                      | \$ 117.40                 |
| PVC 10003              | ⅜"x20'    | 04917            | 9360'            | 2.083                            | 0.675         | .126            | 920 PSI                                   | 13.8                      | \$ 132.95                 |
| PVC 10005              | ½"x20'    | 03968            | 6880'            | 2.083                            | 0.840         | .147            | 850 PSI                                   | 20.3                      | \$ 55.60                  |
| PVC 10007              | ¾"x20'    | 03969            | 4200'            | 2.083                            | 1.050         | .154            | 690 PSI                                   | 27.5                      | \$ 72.00                  |
| PVC 10010              | 1"x20'    | 03970            | 3540'            | 2.191                            | 1.315         | .179            | 630 PSI                                   | 40.5                      | \$ 105.00                 |
| PVC 10012              | 1¼"x20'   | 03973            | 4240'            | 4.166                            | 1.660         | .191            | 520 PSI                                   | 55.9                      | \$ 141.00                 |
| PVC 10015              | 1½"x20'   | 03976            | 3300'            | 3.570                            | 1.900         | .200            | 470 PSI                                   | 67.7                      | \$ 169.00                 |
| PVC 10020              | 2"x20'    | 03977            | 2220'            | 3.570                            | 2.375         | .218            | 400 PSI                                   | 93.6                      | \$ 228.00                 |
| PVC 10025              | 2½"x20'   | 03978            | 1360'            | 3.570                            | 2.875         | .276            | 420 PSI                                   | 142.8                     | \$ 284.00                 |
| PVC 10030              | 3"x20'    | 03979            | 960'             | 3.570                            | 3.500         | .300            | 370 PSI                                   | 194.2                     | \$ 448.00                 |
| PVC 10040              | 4"x20'    | 03980            | 1080'            | 7.144                            | 4.500         | .337            | 320 PSI                                   | 279.3                     | \$ 652.00                 |
| PVC 10050              | 5"x20'    | 04831            | 760'             | 7.144                            | 5.563         | .375            | 290 PSI                                   | 387.3                     | \$ 784.90                 |
| PVC 10060              | 6"x20'    | 03981            | 520'             | 7.144                            | 6.625         | .432            | 280 PSI                                   | 532.7                     | \$1255.00                 |
| PVC 10080              | 8"x20'    | 04175            | 300'             | 8.330                            | 8.625         | .500            | 250 PSI                                   | 808.9                     | \$1852.00                 |
| PVC 10100              | 10"x20'   | 04768            | 160'             | 7.144                            | 10.750        | .593            | 230 PSI                                   | 1199.3                    | \$2760.00                 |
| PVC 10120              | 12"x20'   | 04770            | 120'             | 8.928                            | 12.750        | .687            | 230 PSI                                   | 1650.1                    | \$3795.00                 |
| PVC 10140              | 14"x20'   | 04816            | 60'              | 4.160                            | 14.000        | .750            | 220 PSI                                   | 1930.0                    | \$4830.00                 |
| PVC 10160              | 16"x20'   | 04919            | 60'              | 5.000                            | 16.000        | .843            | 220 PSI                                   | 2544.1                    | \$6106.00                 |

**NOTE:** For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

Full pallets are polyethylene wrapped for cleanliness and UV protection.

NSF Listed. Meets All Requirements of ASTM D 1784 and ASTM D 1785.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.



**WARNING**

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.



# PVC Schedule 80 Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.



## >> PVC Schedule 80 Pipe, Type 1, Grade 1 - Belled End

ASTM D 1784 & ASTM D 1785

| PVC SCHEDULE 80 (GRAY) |           |                  | BELLED-END       |                                  |               |                 | PVC 1120                                  |                           |                           |
|------------------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|-------------------------------------------|---------------------------|---------------------------|
| PART NO.               | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | MAX WORK<br>PRESSURE<br>AT 23° C OR 73° F | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 10005B             | ½"x20'    | 04924            | 6880'            | 2.083                            | 0.840         | .147            | 850 PSI                                   | 20.3                      | \$ 59.00                  |
| PVC 10007B             | ¾"x20'    | 04925            | 4200'            | 2.083                            | 1.050         | .154            | 690 PSI                                   | 27.0                      | \$ 76.00                  |
| PVC 10010B             | 1"x20'    | 04926            | 3540'            | 2.083                            | 1.315         | .179            | 630 PSI                                   | 40.5                      | \$ 111.00                 |
| PVC 10012B             | 1¼"x20'   | 04927            | 4240'            | 4.166                            | 1.660         | .191            | 520 PSI                                   | 55.9                      | \$ 148.00                 |
| PVC 10015B             | 1½"x20'   | 04928            | 3300'            | 3.570                            | 1.900         | .200            | 470 PSI                                   | 67.7                      | \$ 178.00                 |
| PVC 10020B             | 2"x20'    | 04764            | 2220'            | 3.570                            | 2.375         | .218            | 400 PSI                                   | 93.6                      | \$ 230.00                 |
| PVC 10025B             | 2½"x20'   | 04875            | 1360'            | 3.570                            | 2.875         | .276            | 420 PSI                                   | 142.8                     | \$ 286.00                 |
| PVC 10030B             | 3"x20'    | 04776            | 960'             | 3.570                            | 3.500         | .300            | 370 PSI                                   | 191.1                     | \$ 450.00                 |
| PVC 10040B             | 4"x20'    | 04774            | 1080'            | 7.144                            | 4.500         | .337            | 320 PSI                                   | 279.3                     | \$ 654.00                 |
| PVC 10060B             | 6"x20'    | 04763            | 520'             | 7.144                            | 6.625         | .432            | 280 PSI                                   | 532.7                     | \$1256.00                 |
| PVC 10080B             | 8"x20'    | 04766            | 300'             | 7.144                            | 8.625         | .500            | 250 PSI                                   | 808.9                     | \$1853.00                 |
| PVC 10100B             | 10"x20'   | 04769            | 160'             | 8.928                            | 10.750        | .593            | 230 PSI                                   | 1199.3                    | \$2762.00                 |
| PVC 10120B             | 12"x20'   | 04771            | 120'             | 7.144                            | 12.750        | .687            | 230 PSI                                   | 1650.1                    | \$3797.00                 |
| PVC 10140B             | 14"x20'   | 04832            | 60'              | 4.160                            | 14.000        | .750            | 220 PSI                                   | 1930.0                    | \$4830.00                 |
| PVC 10160B             | 16"x20'   | 09372            | 60'              | 5.000                            | 16.000        | .843            | 220 PSI                                   | 2544.1                    | \$6106.00                 |

**NOTE:** For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.  
Full pallets are polyethylene wrapped for cleanliness and UV protection.

NSF Listed. Meets All Requirements of ASTM D 1784 and ASTM D 1785.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.



**WARNING**

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

# ChemDrain® CPVC Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.  
ChemDrain is a registered trademark of Charlotte Pipe and Foundry Company.



## >> ChemDrain® CPVC Schedule 40 Pipe, Type IV, Grade 1

For Non-Pressure Applications

ASTM D 1784 & ASTM F 2618

| CPVC SCHEDULE 40 (LIGHT GRAY) |           |                  | PLAIN END        |                                  |               |                    | CPVC 4120                 |                           |
|-------------------------------|-----------|------------------|------------------|----------------------------------|---------------|--------------------|---------------------------|---------------------------|
| PART NO.                      | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL<br>(IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| AW 14015                      | 1½" x 10' | 10732            | 1650'            | 1.780                            | 1.900         | .145               | 55.3                      | \$ 765.00                 |
| AW 14002                      | 2" x 10'  | 10733            | 1110'            | 1.780                            | 2.375         | .154               | 74.3                      | \$ 1,034.00               |
| AW 14003                      | 3" x 10'  | 10734            | 1040'            | 4.160                            | 3.500         | .216               | 154.2                     | \$ 1,869.00               |
| AW 14004                      | 4" x 10'  | 10735            | 600'             | 4.160                            | 4.500         | .237               | 219.6                     | \$ 2,653.00               |
| AW 14006                      | 6" x 10'  | 10736            | 330'             | 4.160                            | 6.625         | .280               | 386.1                     | \$ 4,791.00               |
| AW 14008                      | 8" x 10'  | 11363            | 180'             | 4.160                            | 8.625         | .322               | 581.1                     | \$ 9,254.00               |

**NOTE:** For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.  
Full skids of pipe are polyethylene wrapped for cleanliness and UV protection.

NSF Listed. Meets All Requirements of ASTM D 1784 and ASTM F 2618.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.



You can't beat the system.®

## NOTICE

### NOT FOR PRESSURE

Do not use ChemDrain CPVC pipe for pressure applications. The use of ChemDrain CPVC pipe in pressure applications may result in system failure and property damage.

## ! WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.



# PVC Sewer Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.

## >>PVC SDR 35 PSM Pipe

ASTM D 3034 & ASTM F 477

| SDR-35    |           | GASKETED - PS 46 |                  |                                  |                  |                           |               |                 |                           |
|-----------|-----------|------------------|------------------|----------------------------------|------------------|---------------------------|---------------|-----------------|---------------------------|
| PART NO.  | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | LAYING<br>LENGTH | WT. PER<br>100 FT. (LBS.) | AVG. OD (IN.) | MIN. WALL (IN.) | LIST PRICE<br>PER 100 FT. |
| S/M 6004G | 4"x14'    | 11920            | 840'             | 5.556                            | 14'-0"           | 110.4                     | 4.215         | .120            | <b>\$ 286.00</b>          |
| S/M 6004G | 4"x20'    | 04012            | 1200'            | 7.144                            | 20'-0"           | 109.7                     | 4.215         | .120            | <b>286.00</b>             |
| S/M 6006G | 6"x14'    | 11921            | 462'             | 5.555                            | 14'-0"           | 249.6                     | 6.275         | .180            | <b>546.00</b>             |
| S/M 6006G | 6"x20'    | 04016            | 660'             | 8.330                            | 20'-0"           | 247.0                     | 6.275         | .180            | <b>546.00</b>             |
| S/M 6008G | 8"x14'    | 11922            | 140'             | 3.333                            | 14'-0"           | 451.0                     | 8.400         | .240            | <b>928.00</b>             |

Weight is approximate and is for shipping purposes only.

| SDR-35   |           | SOLVENT WELD - PS 46 |                  |                                  |                  |                           |               |                 |                           |
|----------|-----------|----------------------|------------------|----------------------------------|------------------|---------------------------|---------------|-----------------|---------------------------|
| PART NO. | NOM. SIZE | UPC #<br>611942-     | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | LAYING<br>LENGTH | WT. PER<br>100 FT. (LBS.) | AVG. OD (IN.) | MIN. WALL (IN.) | LIST PRICE<br>PER 100 FT. |
| S/M 6004 | 4"x10'    | 04008                | 600'             | 4.160                            | 10'-0"           | 108.3                     | 4.215         | .120            | <b>\$ 276.00</b>          |
| S/M 6004 | 4"x20'    | 04009                | 1200'            | 7.144                            | 20'-0"           | 108.3                     | 4.215         | .120            | <b>276.00</b>             |
| S/M 6006 | 6"x10'    | 04013                | 330'             | 4.166                            | 10'-0"           | 241.7                     | 6.275         | .180            | <b>532.00</b>             |
| S/M 6006 | 6"x20'    | 04014                | 660'             | 8.330                            | 20'-0"           | 241.7                     | 6.275         | .180            | <b>532.00</b>             |

Weight is approximate and is for shipping purposes only.

**NOTE:** For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

Meets All Requirements of ASTM D 3034. SDR 35 Gaskets meet or exceed ASTM F 477. Gasketed joints meet ASTM D 3212.

## NOTICE

### NOT FOR PRESSURE

Do not use PVC Sewer pipe for pressure applications. The use of sewer pipe in pressure applications may result in system failure and property damage.



## WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

# PVC Sewer and Drain Pipe

Possession of this price list shall not be construed as an offer to sell the products listed.

## >> PVC ASTM D 2729 Pipe

| SOLVENT WELD BELLED END |           |                  |                  |                                  |               |                 |                     | ASTM D 2729               |                           |
|-------------------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|---------------------|---------------------------|---------------------------|
| PART NO.                | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | BELL DEPTH<br>(IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 30030               | 3"x10'    | 10903            | 810'             | 3.125                            | 3.250         | 0.070           | 3.00                | 52.8                      | \$ 110.00                 |
| PVC 30040               | 4"x10'    | 10905            | 500'             | 3.125                            | 4.215         | 0.075           | 3.50                | 70.4                      | \$ 130.00                 |

## >> Perforated PVC ASTM D 2729 Pipe

| SOLVENT WELD BELLED END |           |                  |                  |                                  |               |                 |                     | ASTM D 2729               |                           |
|-------------------------|-----------|------------------|------------------|----------------------------------|---------------|-----------------|---------------------|---------------------------|---------------------------|
| PART NO.                | NOM. SIZE | UPC #<br>611942- | QTY. PER<br>SKID | TRUCKLOAD<br>PERCENT<br>PER SKID | AVG. OD (IN.) | MIN. WALL (IN.) | BELL DEPTH<br>(IN.) | WT. PER<br>100 FT. (LBS.) | LIST PRICE<br>PER 100 FT. |
| PVC 30030P              | 3"x10'    | 11814            | 1040'            | 4.160                            | 3.250         | 0.070           | 3.00                | 52.8                      | \$ 110.00                 |
| PVC 30040P              | 4"x10'    | 11815            | 500'             | 3.125                            | 4.215         | 0.075           | 3.50                | 70.4                      | \$ 130.00                 |

Perforated pipe is supplied with two rows of 1/2" diameter holes every five inches. Rows are parallel to the pipe axis and are 120° apart.

Weight is approximate and is for shipping purposes only.

NOTE: For truckloads of mixed sizes, multiply skids desired by truckload percent per skid.

Pipe listed in this section meets or exceeds the requirements of ASTM D 2729.

All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.



You can't beat the system.®

## NOTICE

### NOT FOR PRESSURE

Do not use PVC Sewer pipe for pressure applications. The use of sewer pipe in pressure applications may result in system failure and property damage.

## ! WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings can result in explosive failures and cause severe injury or death.

AIR/GAS



- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC / Cast Iron pipe or fittings.
- NEVER test PVC / ABS / CPVC / Cast Iron pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC / Cast Iron pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.

## Terms of Sale

We are pleased to present our list price schedules for use in ordering Charlotte Pipe and Foundry Company® (Charlotte Pipe®) Products. To determine current prices, please refer to the prices shown in the list price schedules. You may seek further clarification from our local manufacturers' agent or the factory sales office. **All prices in list price schedules are subject to change without notice. Orders will be billed at the prevailing price at the time of shipment.** All quotations, sales, and agreements are subject to strikes, accidents, transportation failures or other causes beyond our control. Any tax, effective under present or future laws, shall be added as an extra to the price of the product and shall be paid by the purchaser. **Possession of product information or list price schedules shall not be construed as an offer to sell the product listed.**

**ARBITRATION: CHARLOTTE PIPE AND CUSTOMER AGREE THAT ANY DISPUTE, CLAIM OR CONTROVERSY OF ANY NATURE, WHETHER BASED ON CONTRACT, TORT, STATUTE, OR ANY OTHER LEGAL OR EQUITABLE THEORY, ARISING OUT OF OR RELATED TO THE SALE OF PRODUCTS FROM CHARLOTTE PIPE TO CUSTOMER SHALL BE RESOLVED THROUGH BINDING ARBITRATION ADMINISTERED PURSUANT TO TITLE 9 OF THE U.S. CODE BY JAMS UNDER ITS COMPREHENSIVE ARBITRATION RULES AND PROCEDURES, AND JUDGMENT ON THE AWARD ENTERED BY THE ARBITRATOR(S) MAY BE ENTERED BY ANY COURT HAVING JURISDICTION THEREOF. EITHER PARTY MAY APPLY TO THE ARBITRATOR SEEKING INJUNCTIVE RELIEF UNTIL THE ARBITRATION AWARD IS ENTERED OR THE MATTER IS RESOLVED. EITHER PARTY ALSO MAY, WITHOUT WAIVING ANY REMEDY AVAILABLE TO IT, SEEK FROM ANY COURT OF COMPETENT JURISDICTION ANY PROVISIONAL OR INTERIM RELIEF THAT IS NECESSARY TO PROTECT ITS RIGHTS PENDING THE ARBITRATOR(S)' DETERMINATION OF THE MERITS OF THE DISPUTE, CLAIM OR CONTROVERSY.**

**CLASS ACTION WAIVER: CHARLOTTE PIPE AND CUSTOMER AGREE THAT THERE WILL BE NO RIGHT OR AUTHORITY FOR ANY CLAIM, DISPUTE AND/OR CONTROVERSY COVERED UNDER THE PARTIES' AGREEMENT TO ARBITRATE TO BE BROUGHT, HEARD, OR ARBITRATED AS A CLASS ACTION AND/OR COLLECTIVE ACTION AND/OR REPRESENTATIVE ACTION. NOR SHALL THE ARBITRATOR(S) HAVE ANY AUTHORITY TO HEAR OR ARBITRATE ANY SUCH CLASS AND/OR COLLECTIVE ACTION AND/OR REPRESENTATIVE ACTION. REGARDLESS OF ANYTHING ELSE IN THESE TERMS AND CONDITIONS OR BY VIRTUE OF ANY ARBITRATION RULES OR PROCEDURES OF THE AAA THAT NOW APPLY OR ANY AMENDMENTS AND/OR MODIFICATIONS TO THOSE RULES, THE ENFORCEABILITY AND VALIDITY OF THIS CLASS ACTION WAIVER MAY BE DETERMINED ONLY BY A COURT AND NOT BY AN ARBITRATOR. NOTWITHSTANDING ANY OTHER CLAUSE CONTAINED IN THESE TERMS AND CONDITIONS, THIS CLAUSE ENTITLED CLASS ACTION WAIVER SHALL NOT BE SEVERABLE FROM THESE TERMS AND CONDITIONS IN ANY CASE IN WHICH THE DISPUTE TO BE ARBITRATED IS BROUGHT AS A CLASS AND/OR COLLECTIVE ACTION. THIS CLASS ACTION WAIVER AND THE AGREEMENT TO ARBITRATE ANY CLAIM, DISPUTE OR CONTROVERSY PRECLUDES CUSTOMER FROM LITIGATING IN COURT OR ARBITRATING ANY CLAIMS AGAINST CHARLOTTE PIPE AS A REPRESENTATIVE OR MEMBER OF A CLASS OR IN A PRIVATE ATTORNEY GENERAL CAPACITY.**

## Additional Information

Charlotte Pipe offers a wide variety of information from product specifications, design and engineering data to installation procedures as well as special considerations in our Plastics Technical and Installation Manual. For complete safety, installation and application information please call 800-438-6091. You may also get information 24 hours a day by calling our fax on demand number at 800-745-9382 or by visiting our website at [www.charlottepipe.com](http://www.charlottepipe.com).

**Failure to follow safety and installation instructions may result in damage, injury or death.**

## Limited Warranty

Charlotte Pipe and Foundry Company® (Charlotte Pipe®) Products are warranted to be free from manufacturing defects and to conform to currently applicable ASTM standards for a period of five (5) years from date of delivery. Buyer's remedy for breach of this warranty is limited to replacement of, or credit for, the defective product. This warranty excludes any expense for removal or reinstallation of any defective product and any other incidental, consequential, or punitive damages. **This limited warranty is the only warranty made by seller and is expressly in lieu of all other warranties, express and implied, including any warranties of merchantability and fitness for a particular purpose.** No statement, conduct or description by Charlotte Pipe or its representative, in addition to or beyond this Limited Warranty, shall constitute a warranty. This Limited Warranty may only be modified in writing signed by an officer of Charlotte Pipe.

This Limited Warranty will not apply if:

- 1) The Products are used for purposes other than their intended purpose as defined by local plumbing and building codes, and the applicable ASTM standard.
- 2) The Products are not installed in good and workmanlike manner consistent with normal industry standards; installed in compliance with the latest instructions published by Charlotte Pipe and good plumbing practices; and installed in conformance with all applicable plumbing, fire and building code requirements.
- 3) This limited warranty does not apply when the products of Charlotte Pipe are used with the products of other manufacturers that do not meet the applicable ASTM or CISPI standards or that are not marked in a manner to indicate the entity that manufactured them.
- 4) In hubless cast iron installations, this warranty will not apply if products are joined with unshielded hubless couplings. Charlotte Pipe requires that its hubless cast iron pipe and fittings be joined only with shielded hubless couplings manufactured in accordance with CISPI 310, ASTM C 1277 and certified by NSF® International or with Heavy Duty Couplings meeting ASTM C 1540.
- 5) The Products fail due to defects or deficiencies in design, engineering, or installation of the piping system of which they are a part.
- 6) The Products have been the subject of modification; misuse; misapplication; improper maintenance or

repair; damage caused by the fault or negligence of anyone other than Charlotte Pipe; or any other act or event beyond the control of Charlotte Pipe.

- 7) The Products fail due to the freezing of water in the Products.
- 8) The Products fail due to contact with chemical agents, fire stopping materials, thread sealant, plasticized vinyl products, or other aggressive chemical agents that are not compatible.
- 9) Pipe outlets, sound attenuation systems or other devices are permanently attached to the surface of Charlotte® PVC, ABS or CPVC products with solvent cement or adhesive glue.

Charlotte Pipe products are manufactured to the applicable ASTM or CISPI standard. Charlotte Pipe and Foundry **cannot** accept responsibility for the performance, dimensional accuracy, or compatibility of pipe, fittings, gaskets, or couplings not manufactured or sold by Charlotte Pipe and Foundry.

Any Charlotte Pipe products alleged to be defective **must** be made available to Charlotte Pipe at the following address for verification, inspection and determination of cause:

Charlotte Pipe and Foundry Company  
Attention: Technical Services  
2109 Randolph Road  
Charlotte, North Carolina 28207

**Purchaser must obtain a return materials authorization** and instructions for return shipment to Charlotte Pipe of any product claimed defective or shipped in error.

Any Charlotte Pipe product **proved** to be defective in manufacture will be replaced F.O.B. point of original delivery, or credit will be issued, at the discretion of Charlotte Pipe.

4/24/15

**All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.**



Charlotte, Charlotte Pipe and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.



# WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC pipe or fittings.
- NEVER test PVC / ABS / CPVC pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.



AIR/GAS

**You can't beat the system.®**

## FlowGuard Gold® CPVC CTS Limited Warranty

Charlotte Pipe and Foundry Company (Charlotte Pipe®) warrants to the original owner of the structure in which its FlowGuard Gold CTS CPVC Pipe and Fittings (the "Products") have been installed, that the Products will be free from manufacturing defects and conform to currently applicable ASTM standards under normal use and service for a period of ten (10) years. Buyer's remedy for breach of this warranty is limited to replacement of, or credit for, the defective product. This warranty excludes any expense for removal or reinstallation of any defective product and any other incidental, consequential, or punitive damages. **This limited warranty is the only warranty made by seller and is expressly in lieu of all other warranties, express and implied, including any warranties of merchantability and fitness for a particular purpose.** No statement, conduct or description by Charlotte Pipe or its representative, in addition to or beyond this Limited Warranty, shall constitute a warranty. This Limited Warranty may only be modified in writing signed by an officer of Charlotte Pipe.

This Limited Warranty will not apply if:

- 1) The Products are used for purposes other than the transmission of domestic water.
- 2) The Products are not installed in good and workmanlike manner consistent with normal industry standards; installed in compliance with the latest instructions published by Charlotte Pipe and good plumbing practices; and installed in conformance with all applicable plumbing, fire and building code requirements.
- 3) This limited warranty does not apply when the products of Charlotte Pipe are used with the products of other manufacturers that do not meet the ASTM standard or that are not marked in a manner to indicate the entity that manufactured them.
- 4) The Products fail due to defects or deficiencies in design, engineering, or installation of the water distribution system of which they are a part.
- 5) The Products have been the subject of modification; misuse; misapplication; improper maintenance or repair; damage caused by the fault or negligence of anyone other than Charlotte Pipe; or any other act or event beyond the control of Charlotte Pipe.
- 6) The Products fail due to the freezing of water in the Products.
- 7) The Products fail due to contact with chemical agents, fire stopping materials, thread sealant, plasticized vinyl products, or other aggressive chemical agents not compatible with CPVC compounds.

Charlotte Pipe products are manufactured to the applicable ASTM standard. Charlotte Pipe and Foundry **cannot** accept responsibility for the performance, dimensional accuracy, or compatibility of pipe, fittings, gaskets, or couplings not manufactured or sold by Charlotte Pipe and Foundry.

Any Charlotte Pipe products alleged to be defective **must** be made available to Charlotte Pipe at the following address for verification, inspection and determination of cause:

Charlotte Pipe and Foundry Company  
Attention: Technical Services  
2109 Randolph Road  
Charlotte, North Carolina 28207

**Purchaser must obtain a return materials authorization** and instructions for return shipment to Charlotte Pipe of any product claimed defective or shipped in error.

Any Charlotte Pipe product **proved** to be defective in manufacture will be replaced F.O.B. point of original delivery, or credit will be issued, at the discretion of Charlotte Pipe.

3/25/10

**All products manufactured by Charlotte Pipe and Foundry Company are proudly made in the U.S.A.**



**You can't beat the system.®**

Charlotte Pipe and "You can't beat the system" are registered trademarks of Charlotte Pipe and Foundry Company.  
FlowGuard Gold is a registered trademark of Lubrizol Corp.



# WARNING

Testing with or use of compressed air or gas in PVC / ABS / CPVC pipe or fittings can result in explosive failures and cause severe injury or death.

- NEVER test with or transport/store compressed air or gas in PVC / ABS / CPVC pipe or fittings.
- NEVER test PVC / ABS / CPVC pipe or fittings with compressed air or gas, or air over water boosters.
- ONLY use PVC / ABS / CPVC pipe or fittings for water or approved chemicals.
- Refer to warnings on PPFA's website and ASTM D 1785.



AIR/GAS

# CHARLOTTE

**PIPE AND FOUNDRY COMPANY®**

PO BOX 35430

CHARLOTTE


NORTH CAROLINA 28235

PHONE (704) 348-6450

(800) 438-6091

FAX (800) 553-1605

[WWW.CHARLOTTEPIPE.COM](http://WWW.CHARLOTTEPIPE.COM)

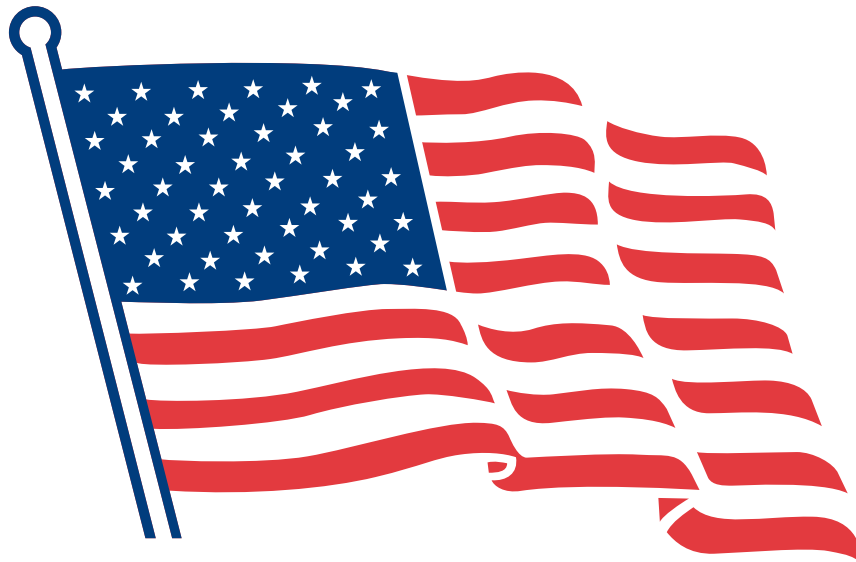

All products manufactured by  
Charlotte Pipe and Foundry Company  
are proudly made in the U.S.A.

